



KORONO
INDUSTRIAL CASTERS

Industrial casters.

Find your range.

PRODUCT RANGE GUIDE / 2026

28 series across light-duty, heavy-duty, integral wheel and shock-absorbing caster families.

For importers, distributors and equipment manufacturers. Compare dimensions, then request the exact configuration and quotation for your application.

Important: This is a product selection guide. Confirm wheel material, load capacity, mounting dimensions, configurations and availability for your selected model before ordering. No per-wheel load rating is stated in this guide.

Karono Hardware Products (Hengshui) Co., Ltd.
Hengshui, Hebei, China
michael@keluonuo-caster.com
keluonuo-caster.com

Light Duty White Solid-Wheel Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Bolt hole
3"	75	32	100	62 × 92	8.5
4"	100	32	125	62 × 92	8.5
5"	125	32	150	62 × 92	8.5

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Light Duty Iron-Core PU Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Bolt hole
3"	75	32	100	62 × 92	8.5
4"	100	32	125	62 × 92	8.5
5"	125	32	150	62 × 92	8.5

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Light Duty TPR Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Bolt hole
3"	75	32	100	62 × 92	8.5
4"	100	32	125	62 × 92	8.5
5"	125	32	150	62 × 92	8.5

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Light Duty Yellow PP Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Bolt hole
3"	75	32	100	62 × 92	8.5
4"	100	32	125	62 × 92	8.5
5"	125	32	150	62 × 92	8.5

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Light Duty Globe-Tread PP Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Bolt hole
3"	75	32	100	62 × 92	8.5
4"	100	32	125	62 × 92	8.5
5"	125	32	150	62 × 92	8.5

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Light Duty Open-Spoke PP Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Bolt hole
3"	75	32	100	62 × 92	8.5
4"	100	32	125	62 × 92	8.5
5"	125	32	150	62 × 92	8.5

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Light Duty Gold-Core Rubber Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Bolt hole
3"	75	32	100	62 × 92	8.5
4"	100	32	125	62 × 92	8.5
5"	125	32	150	62 × 92	8.5

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Light Duty Black Rubber Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Bolt hole
3"	75	32	100	62 × 92	8.5
4"	100	32	125	62 × 92	8.5
5"	125	32	150	62 × 92	8.5

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty White Solid-Wheel Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	45	135	95 × 110	72 × 85	11
5"	125	45	160	95 × 110	72 × 85	11
6"	150	45	185	95 × 110	72 × 85	11
8"	200	45	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Ribbed White Solid-Wheel Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Spoked White Solid-Wheel Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	45	135	95 × 110	72 × 85	11
5"	125	45	160	95 × 110	72 × 85	11
6"	150	45	185	95 × 110	72 × 85	11
8"	200	45	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Anti-Winding PP Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Yellow PP Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Burgundy PP Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Bright Red PP Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty TPR Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Grey Treaded Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Iron-Core PU Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Korean-Type Iron-Core PU Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Gold-Core Rubber Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty Black Rubber Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	135	95 × 110	72 × 85	11
5"	125	50	160	95 × 110	72 × 85	11
6"	150	50	185	95 × 110	72 × 85	11
8"	200	50	235	95 × 110	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Heavy Duty High-Load PP Caster



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	155	99 × 115	72 × 85	11
5"	125	50	180	99 × 115	72 × 85	11
6"	150	50	205	99 × 115	72 × 85	11
8"	200	50	230	99 × 115	72 × 85	11

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Integral PP Wheel Caster



Mounting: Bolt-hole stem Configuration: Swivel

Size (in)	Diameter	Tread width	Stem length	Stem diameter
6"	150	45	90	32
8"	200	45	90	32

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Integral Burgundy PP Wheel Caster



Mounting: Bolt-hole stem Configuration: Swivel

Size (in)	Diameter	Tread width	Stem length	Stem diameter
6"	150	45	90	32
8"	200	45	90	32

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Integral Iron-Core PU Wheel Caster



Mounting: Bolt-hole stem Configuration: Swivel

Size (in)	Diameter	Tread width	Stem length	Stem diameter
6"	150	45	90	32
8"	200	45	90	32

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Integral Iron-Core Rubber Wheel Caster



Mounting: Bolt-hole stem Configuration: Swivel

Size (in)	Diameter	Tread width	Stem length	Stem diameter
6"	150	45	90	32
8"	200	45	90	32

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Shock-Absorbing Caster - Blue Bracket



Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake


Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	175	113 × 140	75 × 105	13
5"	125	50	200	113 × 140	75 × 105	13
6"	150	50	225	113 × 140	75 × 105	13
8"	200	50	250	113 × 140	75 × 105	13

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.

Shock-Absorbing Caster - Zinc Bracket

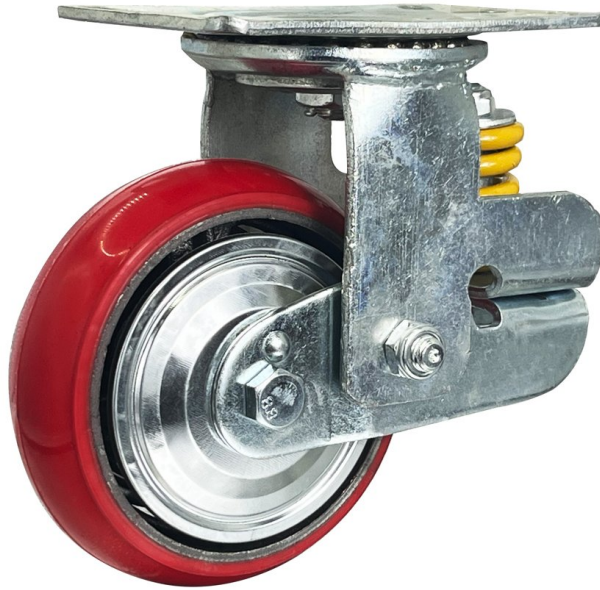

Mounting: Top plate Configuration: Rigid / Swivel / Swivel with brake

Size (in)	Diameter	Tread width	Mounting height	Plate size	Hole centres	Bolt hole
4"	100	50	175	113 × 140	75 × 105	13
5"	125	50	200	113 × 140	75 × 105	13
6"	150	50	225	113 × 140	75 × 105	13
8"	200	50	250	113 × 140	75 × 105	13

Dimensions in millimetres unless stated otherwise. Product photo represents the series; confirm the supplied configuration in your quotation.

Request a quotation

Share wheel diameter, total equipment weight and payload, number of casters, mounting drawing, floor conditions, quantity and destination.